



Dual Slant Polarized Triple Band (6 Port) Antenna, 584-746/1695-2200/1695-2200MHz, 65 deg, 15.3/18.3/18.3dBi, 1.8m (6ft), VET, RET, 0-12°/0-10°/0-10° Tilt Range

FEATURES / BENEFITS

This antenna provides a 6 Port multi-band flexible platform for advanced use for flexible use in deployment scenarios for encompassing 600MHz, 700MHz, AWS & PCS applications.



- ➔ Field Replaceable (Integrated) AISG RET platform for reduced environmental exposure and long lasting quality.
- ➔ Superior elevation pattern performance across the entire electrical down tilt range.
- ➔ Includes three AISG RET motors - Includes 0.5m AISG jumper for optional diasy chain of two high band RET motors for one single point of high band AISG tilt control.

Technical Features

ANTENNA PERFORMANCE - R1

Frequency Range	MHz	584-617	617-698	698-746
Gain	dBi	14.4	14.7	15.3
Horizontal Beamwidth	deg	64	62	60
Vertical Beamwidth	deg	15.9	14.4	13.0
Electrical Down Tilt Range	deg	0-12	0-12	0-12
Upper Side Lobe Suppression Peak to +20	deg	22	21	18
Upper Side Lobe Suppression 0 to +20	deg	20	17	15
Front to Back Ratio +/-30 Copolar	dB	26	27	27
Cross Polar Isolation between ports	dB	26	26	26
Cross Polar Discrimination (XPD) @ Boresight	dB	22	22	21
Cross Polar Discrimination (XPD) at +/- 60	dB	10	8	7
VSWR		1.5:1	1.5:1	1.5:1
3rd Order IMP 2 x 43dBm	dBc			-153
Maximum Power Input	Watts	250	250	250



Dual Slant Polarized Triple Band (6 Port) Antenna, 584-746/1695-2200/1695-2200MHz, 65 deg, 15.3/18.3/18.3dBi, 1.8m (6ft), VET, RET, 0-12°/0-10°/0-10° Tilt Range

ANTENNA PERFORMANCE - LEFT B1

Frequency Range	MHz	1695-1880	1850-1990	1920-2200
Gain	dBi	17.1	17.5	18.3
Horizontal Beamwidth	deg	69	68	68
Vertical Beamwidth	deg	6.6	6.1	5.6
Electrical Down Tilt Range	deg	0-10	0-10	0-10
Upper Side Lobe Suppression Peak to +20	dB	18	20	18
Upper Side Lobe Suppression 0 to +20	dB	18	17	17
Front to Back Ratio +/-30 Copolar	dB	29	28	29
Cross Polar Isolation between ports	dB	26	26	26
Cross Polarization (XPD) @ Boresight	dB	21	20	19
Cross Polarization (XPD) @ +/-60	dB	8	10	8
VSWR		1.5:1	1.5:1	1.5:1
3rd Order IMP 2 x 43dBm	dB	153	153	153
Maximum Power Input	Watts	250	250	250

ANTENNA PERFORMANCE - RIGHT B2

Frequency Range	MHz	1695-1880	1850-1990	1920-2200
Gain	dBi	17.0	17.5	18.3
Horizontal Beamwidth	deg	69	68	68
Vertical Beamwidth	deg	6.6	6.1	5.6
Electrical Down Tilt Range	deg	0-10	0-10	0-10
Upper Side Lobe Suppression Peak to +20	dB	19	20	18
Upper Side Lobe Suppression 0 to +20	dB	17	17	16
Front to Back Ratio +/-30 Copolar	dB	27	29	29
Cross Polar Isolation between Ports	dB	26	26	26
Cross Polarization (XPD) @ Boresight	dB	22	19	18
Cross Polarization (XPD) @ +/-60	dB	8	9	8
VSWR		1.5:1	1.5:1	1.5:1
3rd Order IMP 2 x 43dBm	dB	153	153	153
Maximum Power Input	Watts	250	250	250



Dual Slant Polarized Triple Band (6 Port) Antenna, 584-746/1695-2200MHz, 65 deg, 15.3/18.3/18.3dBi, 1.8m (6ft), VET, RET, 0-12°/0-10°/0-10° Tilt Range

ELECTRICAL SPECIFICATIONS


Impedance	Ohm	50.0
Polarization	Deg	+/-45°

MECHANICAL SPECIFICATIONS

Dimensions - H x W x D	mm (in)	1829 x 500 x 216 (72 x 19.7 x 8.5)
Weight (Antenna Only)	kg (lb)	33.5 (73.9)
Weight (Mounting Hardware only)	kg (lb)	11.5 (25.4)
Packing size- HxWxD	mm (in)	1975 x 560 x 411 (77.8 x 22 x 16.2)
Shipping Weight	kg (lb)	51.8 (114.2)
Connector type		6 x 4.3-10 Long Neck Female/Bottom + 6 AISG RET connectors (3 male, 3 female)
Adjustment mechanism		Integrated RET solution AISG compliant (Field Replaceable)
Mounting Hardware Material		Diecast Aluminium and Galvanized steel
Radome Material / Color		Fiberglass / Light Grey RAL7035

TESTING AND ENVIRONMENTAL

Temperature Range	°C (°F)	-40 to 60 (-40 to 140)
Lightning protection		Direct Ground
Survival/Rated Wind Velocity	km/h	241 (150)
Wind Load @Rated Wind Front	N	912.0
Wind Load @Rated Wind Side	N	333.0
Wind Load @Rated Wind Rear	N	1014.0

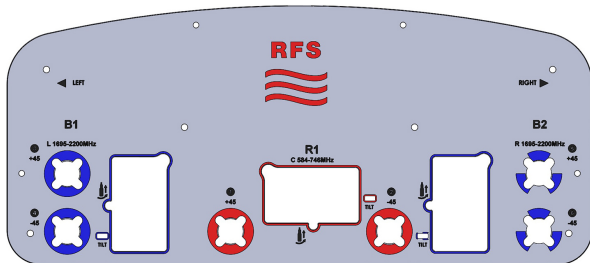



Dual Slant Polarized Triple Band (6 Port) Antenna, 584-746/1695-2200/1695-2200MHz, 65 deg, 15.3/18.3/18.3dBi, 1.8m (6ft), VET, RET, 0-12°/0-10°/0-10° Tilt Range

ORDERING INFORMATION

Order No.	Configuration	Mounting Hardware	Mounting pipe Diameter	Weight
APXVARR18_43-C-NA20	Field Replaceable RET (3)	APM40-5E Heavy Duty Beam Tilt Kit	60-120mm	33.5 kg (73.9 lbs)

External Document Links

APM40-5E_Installation_Instructions

Notes

For additional mounting information please click "External Document Links".
 APM40-5E Mount Kit Included with Antenna.

External Link Reference

